Mineral Resource Estimate Updated for the Cowboy State Mine Area at Halleck Creek

written by Raj Shah | November 19, 2025 **Highlights**

- Updated Mineral Resource Estimate in the Cowboy State Mine ("CSM") Area reclassifies indicated resource by 68.4 million tonnes.
 - 102 Channel Samples collected in 2025 provided data points for an updated geological resource model, resource conversion and mineral resource estimate
 - Summer exploration and mapping collected 18 additional channel samples across the CSM area
 - 18 Channel samples returned average values of 5,471 ppm Total Rare Earth Oxides (TREO)
 - Standout sample (CS25-RM111) contained a new record high assay grade for the entire Halleck Creek Resource with a Total Rare Earth Oxide ("TREO") grade of 13,816 PPM, which is 4X higher than the resource average
- New exploration drilling permits obtained at Halleck Creek:
 - 27 hole locations were permitted at the CSM area for the Development drilling needed for future technical studies beyond the Pre-Feasibility Study ("PFS")
 - 29 hole locations were permitted at the Bluegrass area, a potential exploration target which would add

November 19, 2025 (Source) — American Rare Earths (ASX: ARR | OTCQX: ARRNF | ADR: AMRRY) ("ARR" or the "Company"), is pleased to announce an updated Mineral Resource Estimate for the Cowboy State Mine area within its flagship Halleck Creek Rare Earths Project. The update incorporates the results from 18 additional channel samples and coincides with the acquisition of two new exploration drilling permits.

Odessa Resource Ltd. ("Odessa"), of Perth Australia, were commissioned to update the geological resource model for the CSM Area using 102 channel samples collected during 2025. The locations and assays for the 102 channel samples added to the geological resource model reside in Appendix B. The updated mineral resource estimate for the Cowboy State Mine area is approximately 547.5 million tonnes using a TREO cut-off grade of 1,000ppm, see Table 1 and Figure 4. The channel sample results enabled Odessa to reclassify approximately 63.9 million tonnes to the indicated category from the inferred category from the Mineral Resource Estimate presented in the February 2025 updated CSM Scoping Study¹, see Table 2. Additional mapping associated with the channel sampling expanded the resource area to increase the CSM mineral resource estimate by approximately 4.5 million tonnes. It should be noted that the overall tonnage increase and change in grade do not reflect a material change to the total resource estimates for the Cowboy State Mine area.

It should be clearly noted that Mineral Resources are not Ore Reserves and do not have demonstrated economic viability. There

¹ See ASX release dated February 24, 2025

is no certainty that all or any part of the Mineral Resource will be converted into an Ore Reserve. Areas where ARR does not control mineral resources have been excluded from resource estimates.

Table 1 — Mineral Resource Estimate for the Cowboy State Mine Area at a 1,000ppm TREO cut-off

Resource Area		Tannaga		Gra	de	2	Contained Material					
	Classification	Tonnage	TREO	LREO	HREO	MREO	TREO	LREO	HREO	MREO		
		t	ppm	ppm	ppm	ppm	t	t	t	t		
Cowboy State Mine	Indicated	391,378,955	3,295	2,904	392	929	1,289,650	1,136,405	153,245	363,541		
	Inferred	156,091,388	3,468	3,047	421	984	541,251	475,612	65,639	153,572		
	Total	547,470,344	3,344	2,944	400	945	1,830,901	1,612,018	218,884	517,112		

Table 2 — Differences in the Mineral Resource Estimate from February 2025 to October 2025 at a 1,000ppm TREO cut-off

	-	Y		G	rade		Contained Material					
CSM MRE	Classification	Tonnage	TREO	LREO	HREO	MREO	TREO	LREO	HREO	MREO		
		t	ppm	ppm	ppm	ppm	t	t	t	t		
	Indicated	391,378,955	3,295	2,904	391.551	928.872	1,289,650	1,136,405	153,245	363,541		
Oct 2025 Update	Inferred	156,091,388	3,468	3,047	420.514	983.856	541,251	475,612	65,639	153,572		
7.3 20-01-01-02-02-01-02-02-02-02-02-02-02-02-02-02-02-02-02-	Total	547,470,344	3,344	2,944	399.809	944.549	1,830,901	1,612,018	218,884	517,112		
	Indicated	322,961,462	3,276	2,907	368.697	924.559	1,057,922	938,847	119,075	298,597		
Feb 25 Scoping Study	Inferred	220,014,226	3,677	3,274	403.867	1019.98	809,092	720,236	88,856	224,411		
	Total	542,975,688	3,438	3,056	382.948	963.225	1,867,014	1,659,083	65,639 153 218,884 517 119,075 298 88,856 224 207,932 523 34,170 64, 16,43% 12,4 -23,218 -70, -26,13% -31.	523,008		
	Indicated	68,417,494	19	-3	23	4	231,729	197,559	34,170	64,944		
	Indicated	12.60%	0.57%	-0.11%	5.97%	0.45%	12.41%	11.91%	16.43%	12.42%		
Difference	Infe rred	-63,922,837	-210	-227	17	-36	-267,841	-244,624	-23,218	-70,839		
Difference	mierieu	-29.05%	-5.71%	-6.92%	4.12%	-3.54%	-33.10%	-33.96%	-26.13%	-31.57%		
	Total	4,494,656	-94	-111	17	-19	-36,113	-47,065	10,952	-5,895		
	Total	0.83%	-2.74%	-3.63%	4.40%	-1.94%	-1.93%	-2.84%	5.27%	-1.13%		

In October 2025, ARR received two drilling permits from the Wyoming Department of Environmental Quality — Land Quality Division (WDEQ-LQD). 27 drill hole locations were permitted across the CSM area in preparation for in-fill drilling required for future technical studies beyond the forthcoming PFS.

In addition, 29 drill hole locations were permitted across the Bluegrass Area that has the potential to add meaningful tonnage to the Halleck Creek's current 2.6Bn tonne resource estimate.

Why it matters? Increasing the Indicated Resource estimates at


the CSM area enables near surface resources to be incorporated into pit designs and mine plans for the CSM pre-feasibility study. Stantec will integrate the updated block model with results from the ongoing process optimization work to enhance the CSM pits and mine designs. To maintain momentum and position the CSM Project for timely development, ARR is proactively securing permits for drilling and sampling to support future geological data collection beyond the PFS. Additional in-fill drilling will be required to improve geological confidence across proposed pits in subsequent technical studies.

Additional Technical Details

CSM Resource Model Update

ARR commissioned Odessa Resources Ltd. to update the geological resource model for the CSM area². Odessa evaluated the 102 channel samples collected by ARR and incorporated them into the Leapfrog geological modeling system to update the block model for the CSM area, see Figure 4, Figure 2, and Figure 3. Based on the channel samples, Odessa converted approximately 63.9 million tonnes to indicated resources from inferred resources and added approximately 4.5 million tonnes for a total mineral resource estimate of 547.5 million tonnes in the Cowboy State Mine, see Table 1 and Table 2.

Figure 1 — Plan View of Geological Model (A colluvium excluded; B colluvium included)

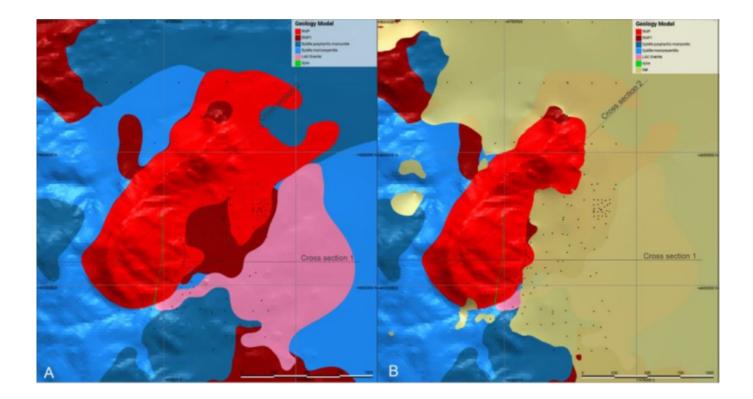

Odessa, 2025

Figure 2 — Cross Sections of the Geological Model

Odessa Summary Report "Red Mountain Update Report Methodology and Resource Estimation Report", November 2025

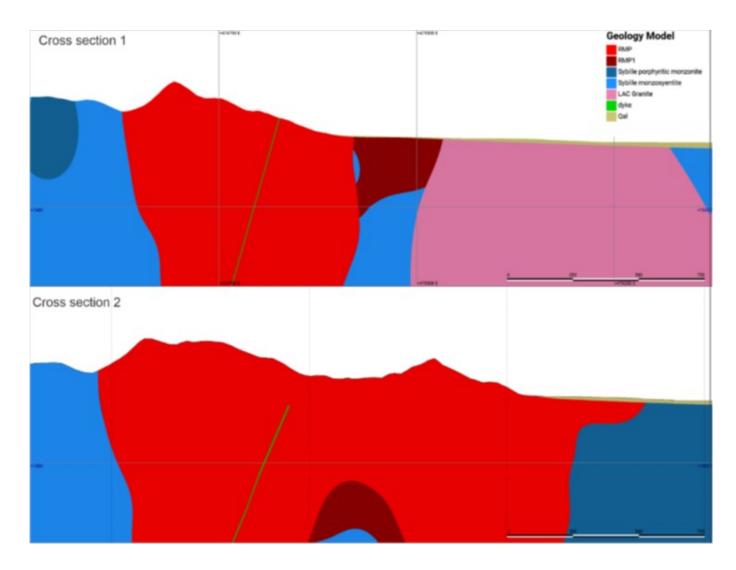


Figure 3 — Perspective View of Domain Model (1.5xVE)

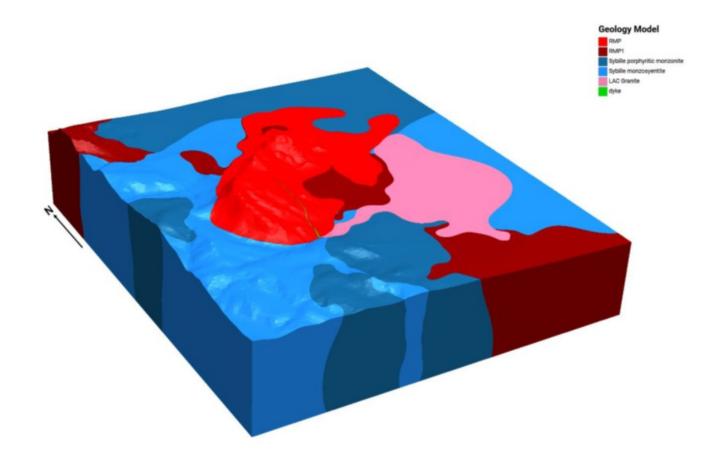


Figure 4 illustrates the TREO geochemical data from the channel samples collected across the CSM area. The channel sample results also facilitated minor changes to lithological domains within the model. This change accounts for an increase of Indicated Resources by an estimated 4.5 million tonnes, or 0.83%. Exploration results for 110 channel samples were presented in previous press releases in May 2025³. The final 18 channel samples collected in 2025 are presented below.

Red Mountain Channel Samples


The Company's geologists mapped a banded zone outcropping at the southwestern side of Red Mountain. 13 channel samples were collected across and adjacent to the banded zone. The average TREO grade of the 13 channel samples on Red Mountain is 5,706 ppm. This zone contains foliated mafic bands within the Red Mountain Pluton, see Figure 5. Channel samples collected across the foliated zone contain high TREO grades. One channel sample

(CS25-RM111) from the zone has a TREO grade of 13,816 ppm, which is the highest TREO assay collected across the CSM area, and the greater Halleck Creek project area. The banded zone ranges in thickness between 1.5 and 3 meters and extends for approximately 250 meters along the southwestern face of Red Mountain. The banded zone plunges below surface to the south. In the same area, WRI geologists observed numerous large allanite phenocrysts (crystals) which exhibit macro-scale metamict⁴ structures from the allanite extending into the surrounding groundmass, see Figure 6.

Figure 4 — Drill hole and Channel Sample Locations — Recent Sample Locations in Blue

³ See ASX release dated May 8, 2025, and ASX release dated May 21, 2025

⁴ Metamict structures occur from decay of radionuclide elements in Allanite over long time periods which breaks down the internal crystal lattice of allanite and adjacent minerals.

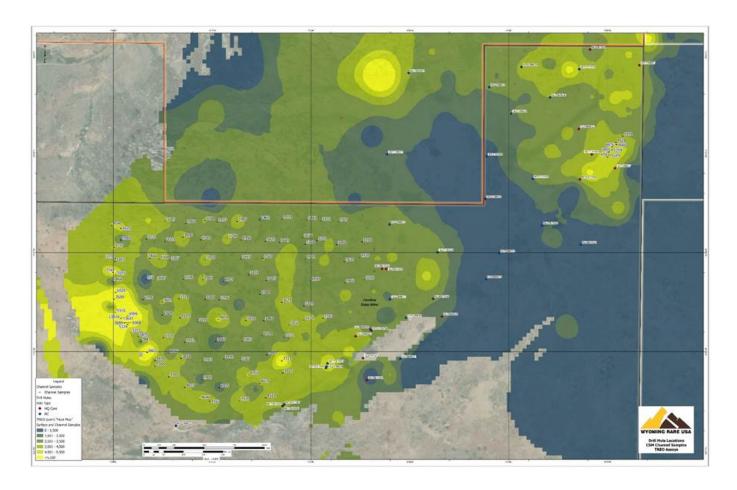

CSM Test Pit Channel Samples

In preparation for bulk sampling from the CSM Test Pit, 5 channel samples were collected from outcrop at the test pit site. The channel samples in the CSM test pit area have an average TREO grade of 4,860 ppm. The highest TREO grade channel sample in the test pit area is 5,549 ppm.

The average Magnet REO grade for the 18 channel samples is 1,614 ppm constituting 28.5% of TREO. This also an increase of 67.6% over the modeled Magnet REO average grade of 963 ppm in the CSM area.

Table 3 — Channel Sample Locations and Key Rare Earth Oxide Values

Channel Sample	UTM Z	one 13N	Surface Elev	Area	TREO	HREO	MREO	LREO
	Easting	Northing						
CS25-RM099	474,518.86	4,632,311.26	2,126.00	Red Mountain	4,909	558	1,347	4,351
CS25-RM100	474,505.86	4,632,235.26	1,931.00	Red Mountain	3,426	596	1,051	2,830
CS25-RM101	474,505.86	4,632,193.26	1,920.00	Red Mountain	4,208	578	1,278	3,630
CS25-RM102	474,505.86	4,632,149.26	1,910.00	Red Mountain	7,530	1,142	2,266	6,388
CS25-RM103	474,535.86	4,632,090.26	1,905.00	Red Mountain	4,433	632	1,307	3,801
CS25-RM104	474,543.86	4,632,048.26	1,892.00	Red Mountain	4,088	1,314	1,380	2,774
CS25-RM105	475,752.52	4,632,504.11	1,753.00	Test Pit	3,995	482	1,138	3,513
CS25-RM106	475,761.42	4,632,509.52	1,754.00	Test Pit	5,264	556	1,525	4,708
CS25-RM107	475,772.09	4,632,522.92	1,753.00	Test Pit	4,666	349	1,228	4,317
CS25-RM108	475,762.03	4,632,517.07	1,753.00	Test Pit	4,826	519	1,361	4,307
CS25-RM109	475,755.23	4,632,495.44	1,753.00	Test Pit	5,549	598	1,638	4,951
CS25-RM110	474,505.18	4,632,098.55	1,893.00	Red Mountain	4,316	589	1,205	3,727
CS25-RM111	474,518.49	4,632,083.18	1,899.00	Red Mountain	13,816	1,630	4,199	12,186
CS25-RM112	474,535.87	4,632,068.79	1,897.00	Red Mountain	5,334	627	1,462	4,707
CS25-RM113	474,562.33	4,632,038.72	1,888.00	Red Mountain	3,475	1,157	1,189	2,318
CS25-RM114	474,518.78	4,632,281.91	1,946.86	Red Mountain	2,040	468	586	1,572
CS25-RM115	474,499.31	4,632,200.16	1,908.35	Red Mountain	7,187	765	1,988	6,422
CS25-RM116	474,585.52	4,631,997.78	1,876.78	Red Mountain	9,411	1,741	2,905	7,670
Average					5,471	795	1,614	4,676

Table 4 — Rare Earth Assays of Recent Channel Samples

Channel Sample TRE	TREA	HDEO	MDEO	LDEO	1-202	0-202	D-0011	NA3O3		vana r	202 (L 2002 T	L407 F		L-202 F	-202 T	202 V	1-202 L	20.2
	THEO	HILLO	PINEO	LILLO	Lazus	Ce ZUS	F10011	N02U3	SIII2U3	1203 6	:0203	00203	D40 / L	1y2U3 F	10 2U 3 E	1203 11	m2U3 1	D2U3 L	1203
CS25-RM099	4,909	558	1,347	4,351	985	2,101	233	903	129	293	14	98	13	69	12	31	4	21	3
CS25-RM100	3,426	596	1,051	2,830	602	1,265	162	684	117	316	15	103	14	74	13	32	4	22	3
CS25-RM101	4,208	578	1,278	3,630	789	1,652	205	849	135	293	16	107	15	74	13	32	4	21	3
CS25-RM102	7,530	1,142	2,266	6,388	1,396	2,899	356	1,493	244	602	19	206	28	145	25	63	7	41	6
CS25-RM103	4,433	632	1,307	3,801	848	1,738	214	867	134	334	15	109	15	77	14	35	4	25	4
CS25-RM104	4,088	1,314	1,380	2,774	434	1,155	176	821	188	735	18	197	30	165	30	75	9	48	7
CS25-RM105	3,995	482	1,138	3,513	760	1,683	185	757	128	257	14	84	11	57	10	24	3	19	3
CS25-RM106	5,264	556	1,525	4,708	1,118	2,144	250	1,037	159	292	15	105	13	66	11	27	3	21	3
CS25-RM107	4,686	349	1,228	4,317	896	2,242	214	842	123	176	13	70	8	41	7	16	2	14	2
CS25-RM108	4,826	519	1,361	4,307	944	2,076	227	914	146	273	14	94	12	62	11	26	3	21	3
CS25-RM109	5,549	598	1,638	4,951	1,139	2,260	272	1,107	173	315	16	110	15	71	13	28	4	23	3
CS25-RM110	4,316	589	1,205	3,727	842	1,763	195	791	136	326	13	94	13	70	13	30	4	23	3
CS25-RM111	13,816	1,630	4,199	12,186	2,580	5,638	692	2,846	430	897	20	287	38	193	35	80	10	61	9
CS25-RM112	5,334	627	1,462	4,707	1,068	2,266	243	974	156	344	14	104	14	75	13	32	4	24	3
CS25-RM113	3,475	1,157	1,189	2,318	298	991	139	709	181	679	14	158	24	136	26	61	8	45	6
CS25-RM114	2,040	468	586	1,572	298	754	84	359	77	268	10	63	10	56	10	25	3	20	3
CS25-RM115	7,187	765	1,988	6,422	1,448	3,096	336	1,336	206	411	15	136	18	92	16	38	5	30	4
CS25-RM116	9,411	1,741	2,905	7,670	1,507	3,513	445	1,849	356	974	18	280	40	215	39	90	11	65	9
Average	5,471	795	1,614	4,676	997	2,180	257	1,063	179	433	15	134	18	97	17	41	5	30	4

Figure 5 — Example of Localized area of foliated texture in outcrop with bands of mafic minerals from Red Mountain


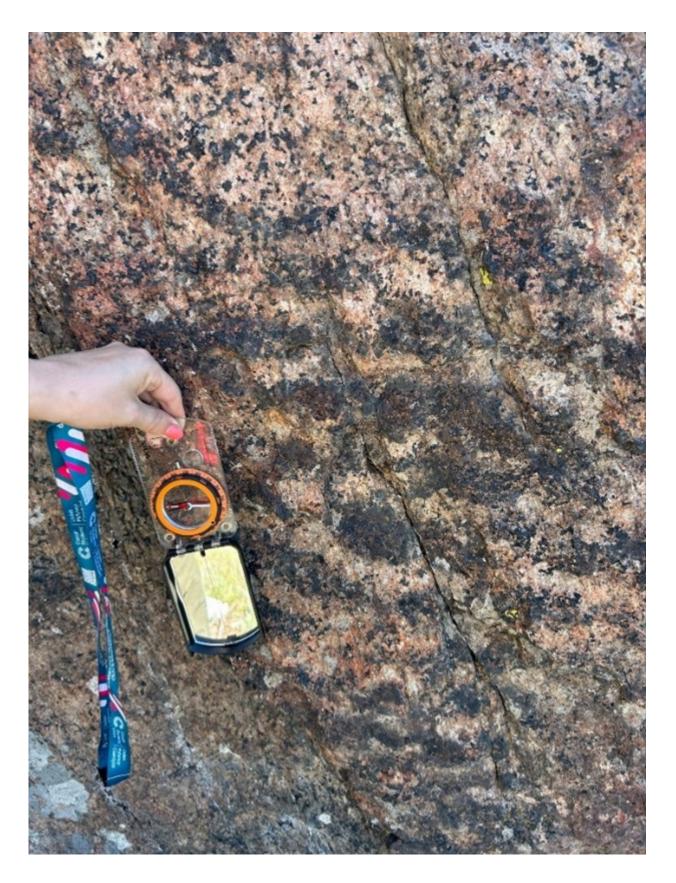


Figure 5 & 6 — Visual estimates of mineral abundance should never be considered a proxy or substitute for laboratory analyses where concentrations or grades are the factor of

principal economic interest. Visual estimates also potentially provide no information regarding impurities or deleterious physical properties relevant to valuations.

Figure 6 — Example of Allanite Phenocryst and Associated Metamict Structure

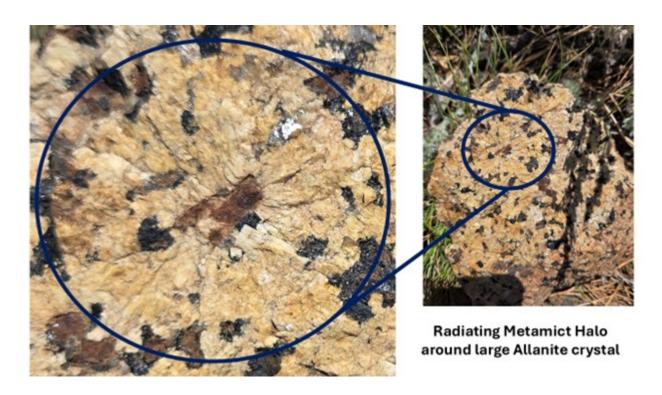


Cowboy State Mine Area Drilling Permit

The proposed drilling at the CSM area will increase geological confidence levels across the proposed pits and further de-risk the CSM leading into development work beyond the pre-feasibility study currently being drafted. The objectives of this drilling are to define substantial measured resources within the proposed pits at CSM, and to determine if higher grade zones observed from channel sampling continue at depth within Red Mountain.

The 18 channel samples taken across the CSM area will provide valuable information for the next phase of development drilling to determine hole orientations and drilling angles. The 27 permitted drill hole locations are positioned around and atop

Red Mountain, see Figure 7. ARR is currently working with consulting geologists and contractors to determine optimal routes for drilling access up Red Mountain. Depending on weather and ground conditions, the construction of access trails is anticipated to commence before the end of the year with drilling planned to commence by mid next year.


Figure 7 — Proposed Hole Locations at Cowboy State Mine

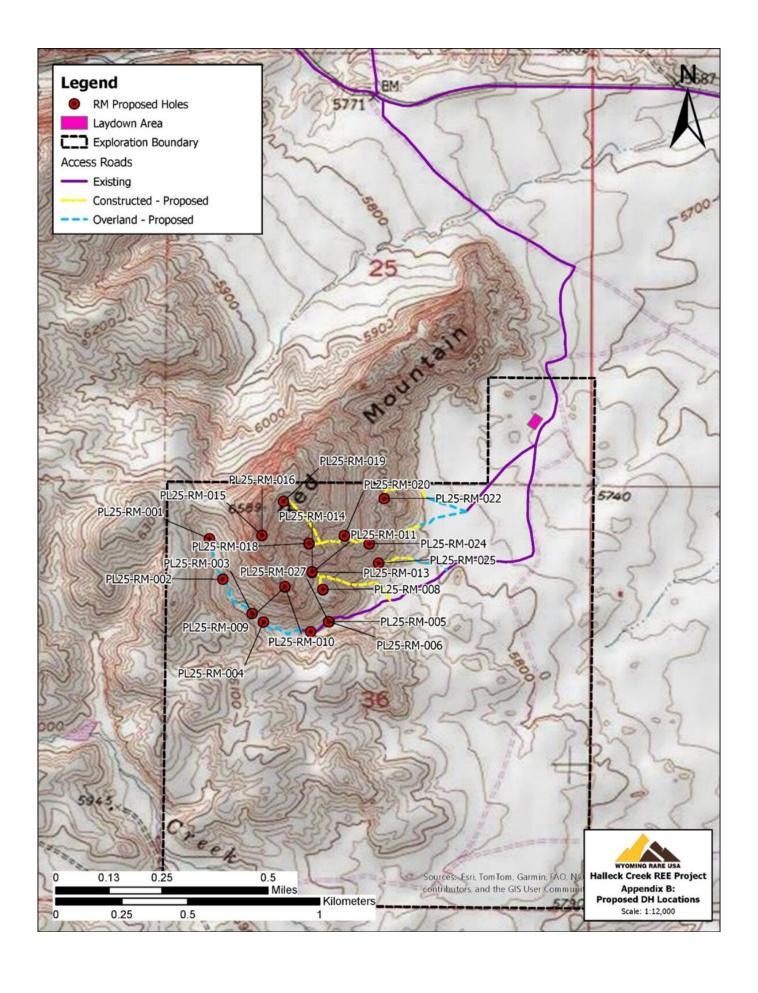

Bluegrass Exploration Area Drilling Permit

Unrelated to the Cowboy State Mine Area, locations for up to 29 drill holes in the Bluegrass exploration area have also been permitted on Federal Land where ARR controls unpatented lode claims, see Figure 8. The drilling permit will enable future exploration drilling to potentially expand the resources at Halleck Creek. Extensive surface geochemical sampling and channel sampling has been performed across the Bluegrass area. These data points indicate that Bluegrass area could have TREO grades similar to grades observed at the Overton Mountain Exploration area. The Bluegrass area has the potential to add meaningful tonnage to Halleck Creek's current 2.63 billion tonne resource estimate.

Figure 8 — Proposed Hole Locations at Bluegrass Exploration Area

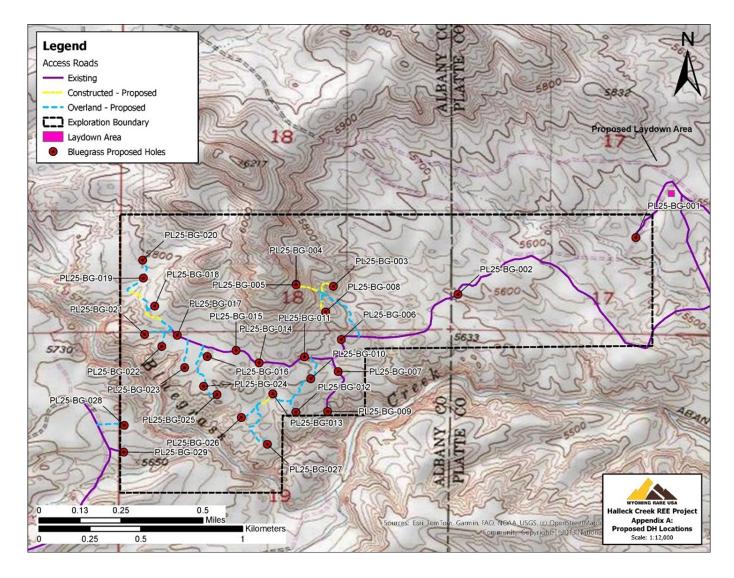

This release was authorized by the Board of American Rare Earths.

Investors can follow the Company's progress at www.americanree.com

For further information contact:

Susan Assadi

Beverly Jedynak

Investor Relations US

<u>Beverly.jedynak@viriathus.com</u>

312 943 1123

Competent Person(s) Statement:

Competent Persons Statement: The information in this document is based on information prepared by American Rare Earths personnel. This work was reviewed and approved for release by Mr. Dwight Kinnes (Society of Mining Engineers #4063295RM) who is employed by American Rare Earths and has sufficient experience which is relevant to the style of mineralization and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 JORC Code. Mr. Kinnes consents to the inclusion in the report of the matters based upon the information in the form and context in which it appears.

ARR confirms it is not aware of any new information or data that materially affects the information included in the original market announcement, and, in the case of estimates of Mineral Resources, that all material assumptions and technical parameters underpinning the estimates in the relevant market announcements continue to apply and have not materially changed. ARR confirms that the form and context in which the Competent Person's findings presented have not been materially modified from the original market announcement.

About American Rare Earths Limited:

American Rare Earths (ASX: ARR | OTCQX: ARRNF | ADR: AMRRY) is a critical minerals company at the forefront of reshaping the U.S. rare earths industry. Through its wholly owned subsidiary, Wyoming Rare (USA) Inc. ("WRI"), the company is advancing the Halleck Creek Project in Wyoming—a world-class rare earth deposit with the potential to secure America's critical mineral independence for generations. Located on Wyoming State land, the Cowboy State Mine within Halleck Creek offers cost-efficient

open-pit mining methods and benefits from streamlined permitting processes in this mining-friendly state.

With plans for onsite mineral processing and separation facilities, Halleck Creek is strategically positioned to reduce U.S. reliance on imports—predominantly from China—while meeting the growing demand for rare earth elements essential to defense, advanced technologies, and economic security. As exploration progresses, the project's untapped potential on both State and Federal lands further reinforces its significance as a cornerstone of U.S. supply chain security. In addition to its resource potential, American Rare Earths is committed to environmentally responsible mining practices and continues to collaborate with U.S. Government-supported R&D programs to develop innovative extraction and processing technologies for rare earth elements.

Photos accompanying this announcement are available at

https://www.globenewswire.com/NewsRoom/AttachmentNg/36fdee7b-668
a-4722-a649-24d8c765e26e

https://www.globenewswire.com/NewsRoom/AttachmentNg/f9b65b4f-776
4-4331-b1d9-09b34b7fd21a

https://www.globenewswire.com/NewsRoom/AttachmentNg/512aa69f-6d9
9-4d3b-be44-ad8c47b46101

https://www.globenewswire.com/NewsRoom/AttachmentNg/b9419152-1a6
5-4e69-8a9a-bd65186b1738

https://www.globenewswire.com/NewsRoom/AttachmentNg/21f9133c-947
3-4268-8ce6-26b9f69c1770

https://www.globenewswire.com/NewsRoom/AttachmentNg/e14b0011-3a7
0-4517-aeff-9d398c1132b2

https://www.globenewswire.com/NewsRoom/AttachmentNg/27a86a41-bd2
7-45aa-ae45-a6ce9ef34e39

https://www.globenewswire.com/NewsRoom/AttachmentNg/bf075abb-7b0
2-4110-93da-c64230eadfe6

https://www.globenewswire.com/NewsRoom/AttachmentNg/a4fbab30-911
2-4fdd-94f8-4f068ca6c20a

https://www.globenewswire.com/NewsRoom/AttachmentNg/17e2295a-516
9-4c44-939e-cf52e6bd7690

https://www.globenewswire.com/NewsRoom/AttachmentNg/33e70777-124
9-4a4d-8264-cf8103e188ec

https://www.globenewswire.com/NewsRoom/AttachmentNg/4b37ec73-65f
4-461e-89e2-6d0172e95754