

# **Antimony Resources Corp. (ATMY) (ATMYF) (K8J0) Reports High-Grade Assays of Up To 33.40% Antimony (Sb) At Its Bald Hill Antimony Deposit**

written by Raj Shah | July 6, 2026

July 06, 2026 ([Source](#)) – Antimony Resources Corp. (CSE: ATMY) (OTCQB: ATMYF) (FSE: K8J0) (the “Company” or “Antimony Resources” or “ATMY”) is pleased to announce that it has received assay results from an additional four drill holes in the Main Zone at the Bald Hill Antimony Property. The drill holes are part of the current drill program of approximately 18,000 meters intended to expand the mineralization in the Main Zone and explore the New Zones identified on the property.

## **Highlights**

- **High-grade values included 13.14 % Antimony (Sb) in drill hole BH-26-20 and 16.65% Sb and 33.40 % Sb In drillhole BH-26-25.**
- **Thickness of these intersected mineralized zones average approximately 4.5 meters with a mineralized zone of 15.9 meters in drill hole BH-26-27.**
- Current results include four drill holes which were drilled from the west side into the Main Zone.
- All holes intersected antimony-bearing stibnite.
- The intersections are predominantly at depths of approximately 100 to 150 meters below surface. With one zone at a depth of 260 meters.

- The drill hole intersections often include multiple zones of mineralization. For example, drill hole BHW-26-25 intersected three zones over a drill hole length of over 44 meters


Table 1: Average Assay Results for Samples from Four Recently Completed Drill Holes in the Main Zone at Bald Hill.

Intersections				
Hole Number	From (m)	To (m)	Length (m)	Assay (Sb%)
BH-26-17	260.60	263.85	3.25	0.67
BH-26-20	<b>91.50</b>	<b>93.95</b>	<b>2.45</b>	<b>13.14</b>
BH-26-25	<b>96.95</b>	<b>102.00</b>	<b>5.05</b>	<b>16.65</b>
Including	<b>98.40</b>	<b>99.50</b>	<b>1.10</b>	<b>33.40</b>
and	129.95	132.95	3.00	1.42
and	143.75	144.20	0.45	4.94
BH-26-27	136.85	152.80	15.95	0.36



## Bald Hill Antimony Drill Hole Location Map

BH-26-17 · BH-26-20 · BH-26-25 · BH-26-27

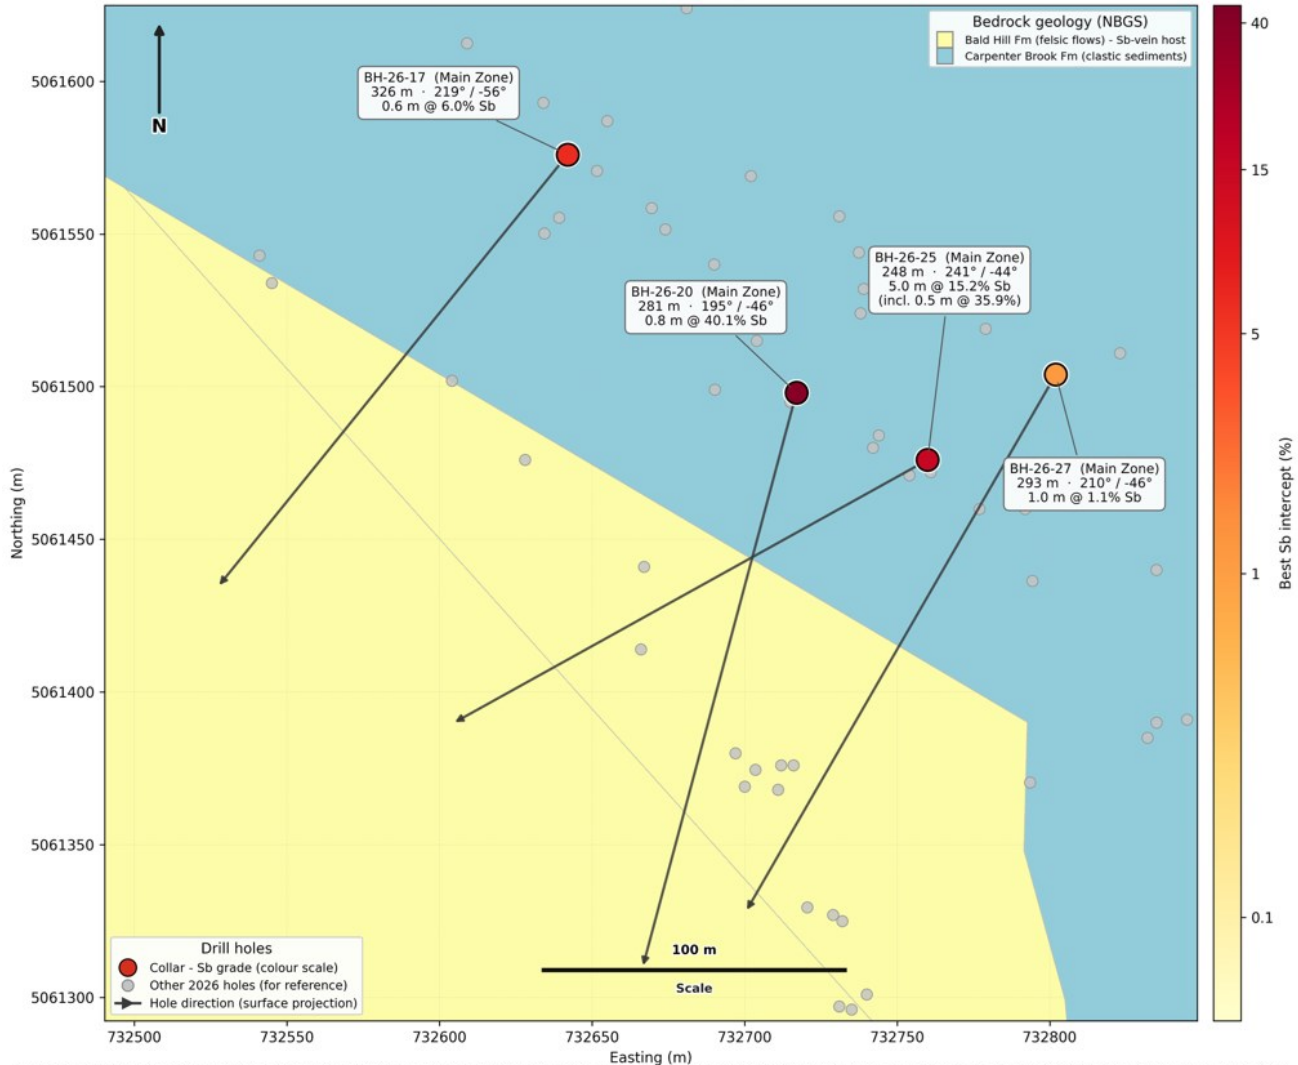

Plan view, UTM Zone 19N (NAD83), metres. Collars are current best surveyed positions; arrows show each hole's direction projected to surface (not true length). Colour = best antimony intercept. Grey points = other 2026 drill holes (for reference). Shaded basemap = NB Geological Survey bedrock geology. Intercepts are draft (computed from assays) - pending Wazir's confirmation.

Figure 1: Locations of Drill holes BH-26-17, BH-26-20, BH-26-25 and BH-26-27 at The Main Zone Bald Hill. Note: drilling was conducted from the east side to intersect the Main Zone. Only Reported Holes are labeled, other drill holes in the vicinity shown as circles.

To view an enhanced version of this graphic, please visit:

[https://images.newsfilecorp.com/files/8411/303997\\_24aac7cc9407da34\\_001full.jpg](https://images.newsfilecorp.com/files/8411/303997_24aac7cc9407da34_001full.jpg)

Mr. James Atkinson PGeo, CEO of Antimony Resources commented "These assays from drill holes in the Main Zone





2305481	136.85	137.65	0.80	> 500	0.06	28		443	0.1	
2305482	137.65	138.10	0.45	> 500	0.72	29		725	0.1	
2305483	138.10	139.10	1.00	339	0.03	< 5	< 0.005	352	0.0	
2305484	139.10	139.85	0.75	> 500	0.91	301	0.3	> 10000	2.2	
2305485	139.85	140.35	0.50	124	0.01	73	0.1	3380	0.3	
2305486	140.35	141.80	1.45	106	0.01	< 5		76.2	0.0	
2305487	141.80	142.80	1.00	> 500	0.10	81	0.1	6870	0.8	
2305488	142.80	143.80	1.00	> 500	1.09	146	0.1	5370	0.7	
2305489	143.80	144.80	1.00	183	0.02	508	0.5	8330	0.8	
2305491	144.80	145.80	1.00	> 500	0.09	640	0.6	> 10000	3.0	
2305492	145.80	146.65	0.85	> 500	0.65	86	0.1	4470	0.5	
2305493	146.65	147.00	0.35	> 500	1.68	62	0.1	581	0.1	
2305494	147.00	148.00	1.00	> 500	0.69	11		343	0.0	
2305495	148.00	149.00	1.00	> 500	0.17	214	0.2	2000	0.2	
2305496	149.00	149.80	0.80	316	0.03	131	0.1	1690	0.2	
2305497	149.80	150.30	0.50	314	0.03	85	0.1	131	0.0	
2305498	150.30	151.30	1.00	> 500	0.18	241	0.2	3650	0.4	
2305499	151.30	152.30	1.00	> 500	0.89	17		124	0.0	0.36 % Sb
										15.45 m

## QA/QC

Samples from the drilling rigs are transported to our secure Core Handling Facility where they are examined by our geotechnical staff. Once the information on core conditions including RQD, lost core etc. are recorded and the core is confirmed to be intact and orderly it is logged and marked for sampling by our professional geological staff. The marked core for sampling is cut by diamond saw one half is returned to the box for safekeeping and one half is placed in plastic bags. The bags are sealed and placed in larger canvas bags for shipment to

the Activation Labs Processing facility in Fredericton where they are crushed and prepared for shipment to the assay lab in Ancaster Ontario. The samples are analyzed using Actlabs Method Code 1E3 Aqua Regia ICP0ES for the multi element and Code 1A2 Fire Assay AA for gold.

Quality Assurance and Quality Control (QA/QC) samples are inserted in the sample runs which include a known standard for antimony and gold, a core duplicate, a blank, and a pulp duplicate. Activation Labs also has standard QA/QC protocols which are reported with each assay batch.

Activation Laboratories in an internationally accredited assay Laboratory.

## **Bald Hill Antimony Project – A Project with Significant Antimony Potential**

### *Highlights*

- Bald Hill is a well-known, high-grade antimony deposit in southern New Brunswick, Canada.
- Assays indicate that Bald Hill is the highest-grade antimony deposit in North America with mineable widths indicated by drilling.
- Drilling has outlined an antimony deposit in the Main Zone over 600 meters long and to a depth of at least 350 meters. The mineralization is open in all directions.
- Widths of mineralization average 4 to 5 meters and grades average 3% to 4% antimony.
- **NI-43-101 Technical Report:** The estimated potential quantity and grade of the drilled area from the 2025 Technical Report, which is the target of our exploration, is reported in the Technical Reports approximately 2.7 million tonnes with a grade between 3% and 4% antimony<sup>1</sup>.

For more details on the Potential of the project as described by the author of the Technical Report please consult the NI43-101 which has been filed on SEDAR. *Antimony Resources Corp. has not completed enough work to confirm this estimate. The potential quantity and grade are conceptual in nature as there has been insufficient exploration to define a mineral resource, and it is uncertain if further exploration will result in the target being delineated as a mineral resource.*

- Potential to expand based on recently discovered targets and additional claims added to the property to the west, south and east.
- New Zones outlined by Soil Sampling approximately 3 kilometres south of the Main Zone on the newly acquired Second Run Claim.

**(1) NATIONAL INSTRUMENT 43-101 TECHNICAL REPORT: BALD HILL ANTIMONY PROJECT SOUTHERN NEW BRUNSWICK, CANADA NTS 21G/09 Prepared for Antimony Resources March 2, 2026. Prepared By John Langton, M.Sc., P. GEO., – JPL GeoServices, Fredericton, New Brunswick, Canada.**

The technical contents of this news release were reviewed and approved by Jim Atkinson, MSc., P. Geo., President and CEO of Antimony Resources Corp. who is a qualified person as defined by National Instrument 43-101.

**About Antimony Resources Corp. (CSE: ATMY) (OTCQB: ATMYF) (FSE: K8J0)**

Antimony Resources Corp. is an exploration and development company focused exclusively on Antimony. The Company's management team possesses extensive experience in financing, exploration, development and mining. The Company is focused on becoming a significant North American producer of antimony.

[www.antimonyresources.ca](http://www.antimonyresources.ca)

On Behalf of the Board of Directors

Jim Atkinson, CEO and President

For further information please contact:

Anthony Simone, President, Simone Capital Inc.

416-881-5154, [asimone@simonecapital.ca](mailto:asimone@simonecapital.ca)